

Hydraulic jack (bottle type)

Designed and produced in compliance with the European Machinery Directive No. 2006/42 / EC transposed into the Italian legislative system through Legislative Decree n. 17/2010

With: EC markings
EC declaration of conformity
Statement report-Fitting for use
Information for use



INTENDED USE: The hydraulic bottle jacks are intended exclusively for vertical lifting of loads. The use must be carried out in controlled efficiency, respecting the measures and limits of use as described in the Information of use, and using the authorized lifting machine and accessories.

CONSTRUCTION TECHNICAL CHARACTERISTICS:


Frame: built entirely in steel

Base: in pressed steel

Hydraulic piping: steel pipes connected without welding

Operating valve assembly: collected in a single block under the pump piston

Jack control: by manual operation of the pump control lever

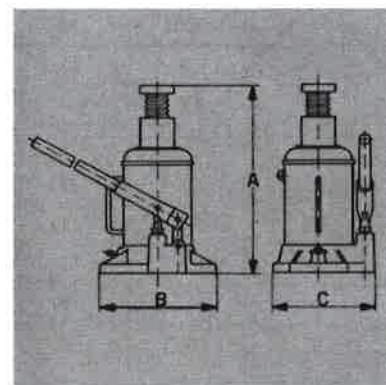

WLL	kg	3.000	5.000	10.000	15.000	20.000
MODEL		NO3000	NO5000	NO10000	NO15000	NO20000
Piston running	mm	150	145	170	190	190
Screw running (manual)	mm	80	85	100	100	100
Size A (at closed jack)	mm	215	220	250	270	275
Size B	mm	115	115	145	145	195
Size C	mm	145	145	170	170	170
Weight	kg	5	6,5	11,5	13	15,5

PRICE ON REQUEST